

# Axx-LC-TR Series

IC SOCKET 2.54mm(0.100") - PITCH=7.62mm

## Specifications

Contact Resistance: 30mΩmax. at DC 100mA

Insulator Resistance: 1000MΩmin. at DC 500V

Current Rating: 1 AMP


Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature: -55~+105°C

Contact: Phosphor Bronze

Housing: PBT & 30% Glass Fiber (UL 94V-0)

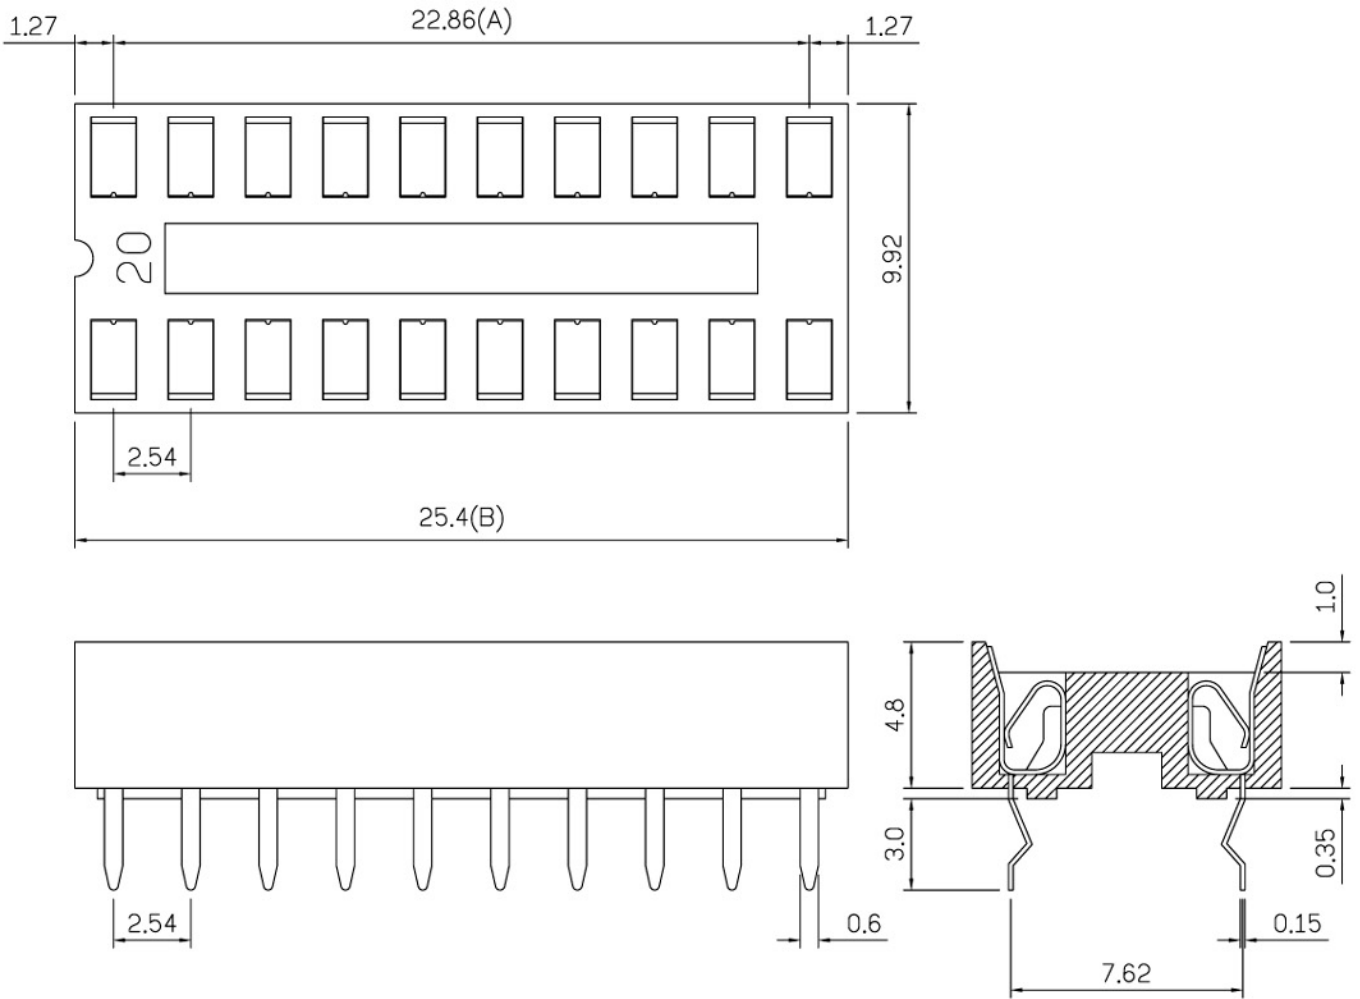

Dimension

Position	A	B
6	5.08	7.62
8	7.62	10.16
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
*20	22.86	25.4
22	25.4	27.94
24	27.94	30.48
28	33.02	35.56
32	38.1	40.64

P/N: A20-LC-TR

一般公差	.00	±0.05	.0	±0.1	0.	±0.3	10-29.99	±0.5
30-99.99	±1.0	100-299.99	±1.5	品名	IC SOCKET 2.54mm(0.100") - PITCH=7.62mm			
ASSMANN Electronics, Inc.	比例	4/1	投影	第三角法	圖檔編號	125-200011		承認
	單位	mm	繪圖	魏 開駿	日期	2003/04/22	版本	