

Notes:

1. 此部品, 禁止使用含有《环境管理物质控制标准》所限制的物质作为材料;
2. 卷带中每位置放置一个产品, 每卷卷带的前端(内圈)预留约15个孔位不使用; 后端(外圈)预留约15个孔位不使用;
3. 边放产品边用封胶带封口;
4. 然后再卷一圈保护带, 保护带最后重叠约50MM, 用皱纹胶纸将其封住;
5. 每个卷盘上贴"标签"; 装好PE袋, 并放入干燥剂一袋;
6. 再将卷盘放入箱子,
7. 外箱外侧图示位置贴"外箱条码标签".

	A	B	C	D	E
ALC04-S30E*A-00	21.2	32	28.4	14.2	8
ALC04-S30E*A-01	21.2	44	40.4	20.2	8
ALC04-S30E*A-02	21.2	44	40.4	20.2	12
ALC04-S40E*A-00	26.2	44	40.4	20.2	8
ALC04-S40E*A-01	26.2	44	40.4	20.2	12
ALC04-S50E*A-00	31.2	44	40.4	20.2	8

PACKAGE INFORMATION:



P/N	Q'TY PER REEL	REEL PER BOX	Q'TY PER BOX
ALC04-S30E*A-00	5000 PCS	8 REEL	40000 PCS
ALC04-S30E*A-01	5000 PCS	6 REEL	30000 PCS
ALC04-S30E*A-02	3600 PCS	6 REEL	21600 PCS
ALC04-S40E*A-00	5000 PCS	6 REEL	30000 PCS
ALC04-S40E*A-01	3600 PCS	6 REEL	21600 PCS
ALC04-S50E*A-00	5000 PCS	6 REEL	30000 PCS

CUSTOMER DRAWING

Tolerance Unspecified (未注公差)	Size(图幅): A4
0.0 ±0.25 0° ±5°	Unit(单位): MM
0.00 ±0.15 0°0 ±3°	Scale(比例): 1:1
0.000 ±0.05 0°00 ±1°	Page(页数): 1 OF 2
Project View (投影视角)	Rev(版本): 2.0

<b>深圳市钜硕电子有限公司</b> SHENZHEN JUSHUO ELECTRONIC CO.,LTD		
Product Name(产品名称): <b>ALC04 载带包装规范(正向)</b>		
Product No(产品料号): <b>ALC04-S**E*A-**</b>		
Designer(设计): <b>Andy</b>	Checked(审核):	Approved(核准):

Rev	Change Description	Date	Revisor
2.0	UPDATE DRAWING	2019/11/08	Andy
1.0	NEW	2019/04/01	Andy
版本	变更内容	日期	制/修订人

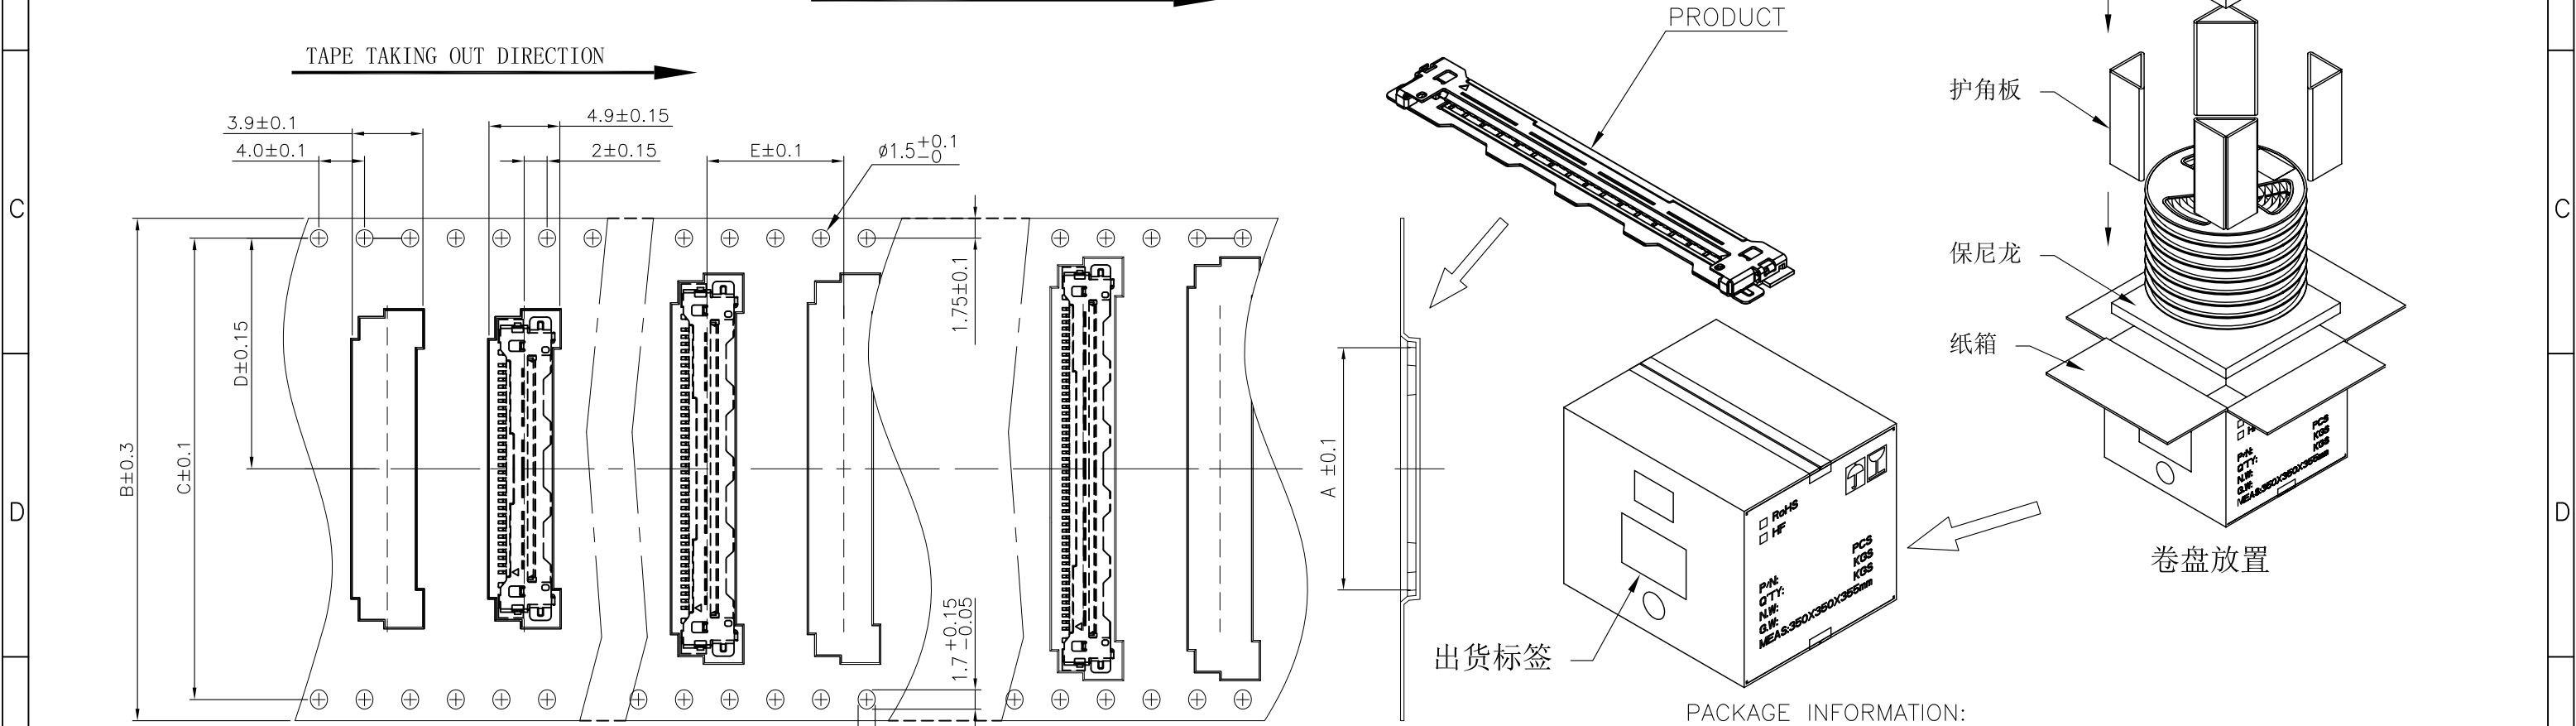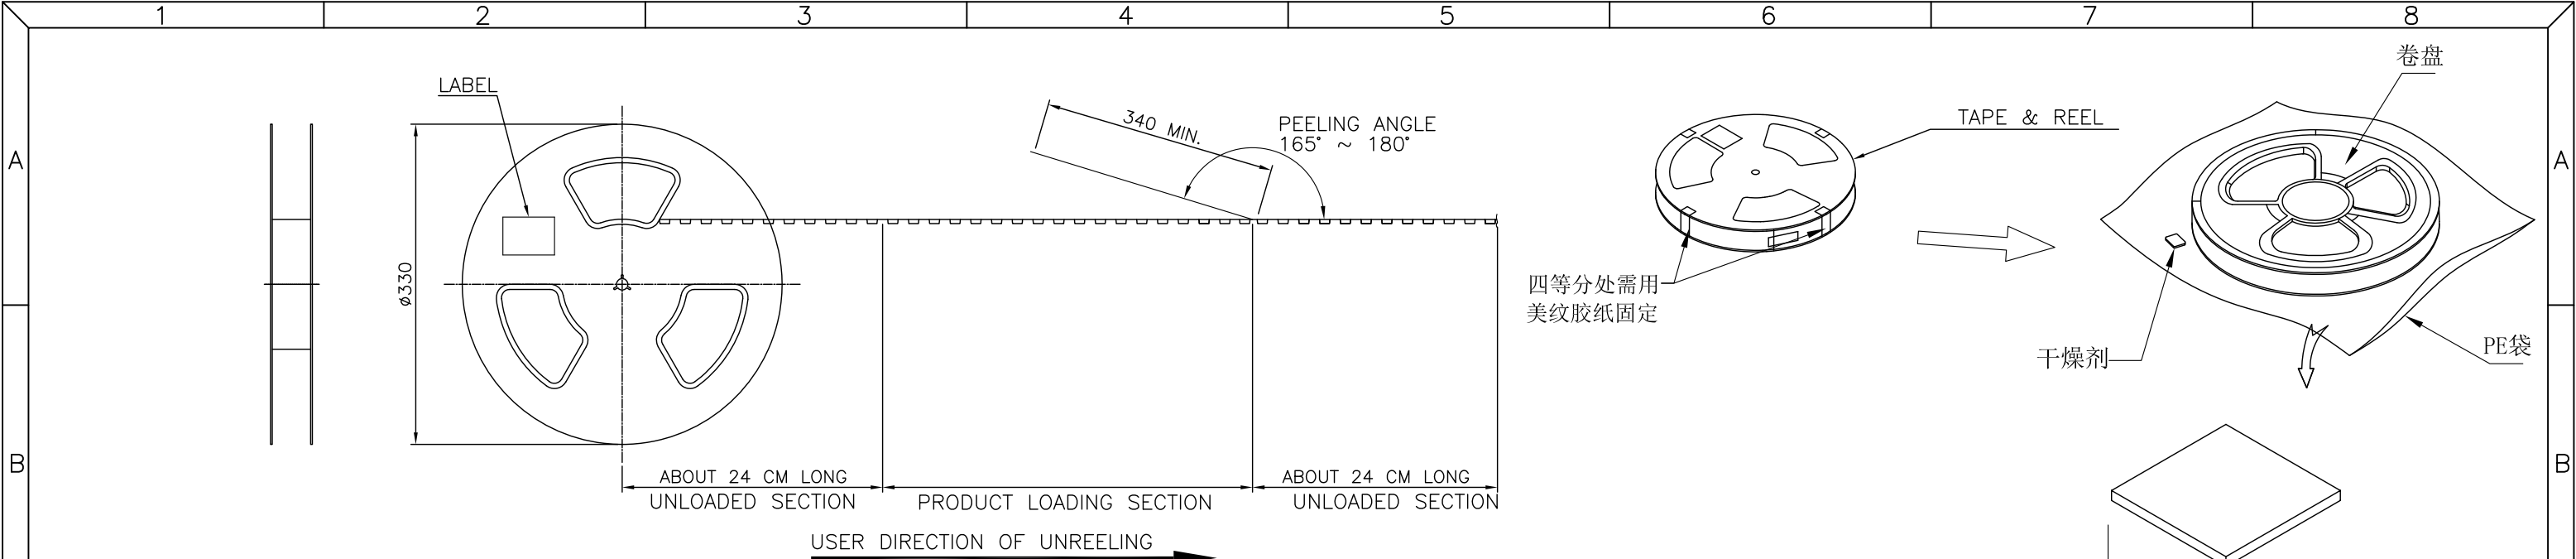

ALC04-S30E\*A-03  
ALC04-S30E\*A-04  
ALC04-S30E\*A-05

ALC04-S40E\*A-02  
ALC04-S40E\*A-03

ALC04-S50E\*A-01

	A	B	C	D	E
ALC04-S30E*A-03	21.2	32	28.4	14.2	8
ALC04-S30E*A-04	21.2	44	40.4	20.2	8
ALC04-S30E*A-05	21.2	44	40.4	20.2	12
ALC04-S40E*A-02	26.2	44	40.4	20.2	8
ALC04-S40E*A-03	26.2	44	40.4	20.2	12
ALC04-S50E*A-01	31.2	44	40.4	20.2	8

PACKAGE INFORMATION:

P/N	Q'TY PER REEL	REEL PER BOX	Q'TY PER BOX
ALC04-S30E*A-03	5000 PCS	8 REEL	40000 PCS
ALC04-S30E*A-04	5000 PCS	6 REEL	30000 PCS
ALC04-S30E*A-05	3600 PCS	6 REEL	21600 PCS
ALC04-S40E*A-02	5000 PCS	6 REEL	30000 PCS
ALC04-S40E*A-03	3600 PCS	6 REEL	21600 PCS
ALC04-S50E*A-01	5000 PCS	6 REEL	30000 PCS

- Notes:
- 1.此部品,禁止使用含有《环境管理物质控制标准》所限制的物质作为材料;
  - 2.卷带中每位置放置一个产品,每卷卷带的前端(内圈)预留约15个孔位不使用;后端(外圈)预留约15个孔位不使用;
  - 3.边放产品边用封胶带封口;
  - 4.然后再卷一圈保护带,保护带最后重叠约50MM,用皱纹胶纸将其封住;
  - 5.每个卷盘上贴“标签”;装好PE袋,并放入干燥剂一袋;
  - 6.再将卷盘放入箱子,
  - 7.外箱外侧图示位置贴“外箱条码标签”.

CUSTOMER DRAWING

Tolerance Unspecified (未注公差)	Size(图幅): A4
0.0 ±0.25 0° ±5°	Unit(单位): MM
0.00 ±0.15 0°0 ±3°	Scale(比例): 1:1
0.000 ±0.05 0°00 ±1°	Page(页数): 2 OF 2
Project View (投影视角)	Rev(版本): 2.0

**深圳市钜硕电子有限公司**  
SHENZHEN JUSHUO ELECTRONIC CO.,LTD

Product Name(产品名称): **ALC04 载带包装规范(反向)**

Product No(产品料号): **ALC04-S\*\*E\*A-\*\***

Designer(设计): **Andy**      Checked(审核):      Approved(核准):

Rev	Change Description	Date	Revisor
2.0	UPDATE DRAWING	2019/11/08	Andy
1.0	NEW	2019/04/01	Andy
版本	变更内容	日期	制/修订人