2.54 (0.100") DIP PLUG CONNECTOR

REVISION DATA									
ITEM	DESCRIPTION	DATE	REMARK						
NEW		05.10.30							


RoHS compliant


SPECIFICATIONS

Current Rating: 3 AMP Voltage Rating: 500V AC/DC Withstand Voltage: 1000V AC/DC Contact Resistance: $20m\Omega$ Max Insulation Resistance: $1000M\Omega$ Min Operation Temperature: $-40^{\circ}C$ to $+105^{\circ}C$

Contact Material: Brass

Contact plating: Au or Sn Over 50U" Ni Insulator Material: PBT+30%GF(UL94V-0)

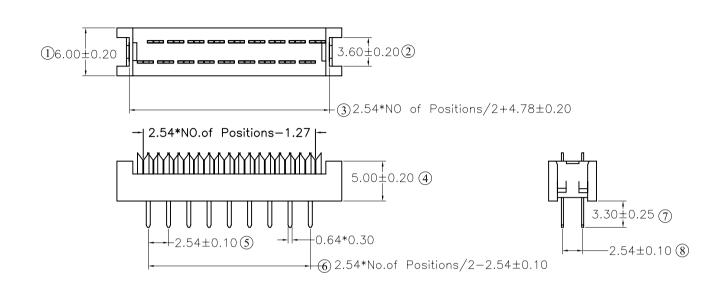

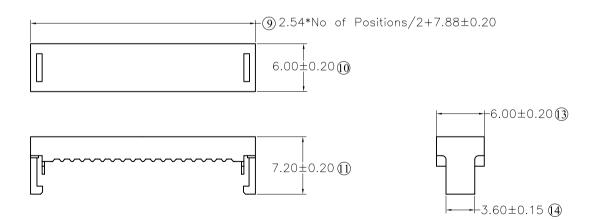



TOLERNCE		DRAWN			PART NO	AWLPxx/3.2-T-R	Issue No	WF-	
Х.	±5°	Χ.		UNIT	MM	TAKT NO		13340 110	
. X	± 2°	$. X \pm 0.38$	CHECKED	SCALE	2: 1	DRAW NO	ASM5310-XXBXXX01	PAGE	1/1
. X	X ± 1°	$. XX \pm 0.25$, DDD OVE	EDITION	A 0		2.54mm DIP plug	T CONNAC	tor
. X	$XX \pm 0.5^{\circ}$	$. XXX \pm 0.12$	APPROVE	DATE	05-10-30	NAME	2.54mm Dir piuş	3 Connec	101