

Revie Prime 850/900/1800/1900 and UMTS Internal Pentaband PCB Antenna



REVIE PRIME INTERNAL PENTABAND PCB ANTENNA

Laird's Revie Prime printed circuit board (PCB) antenna can be placed on the inside of a non-metallic housing, allowing it to be hidden almost anywhere while providing an invisible solution for many applications. The combination of multiple frequency bands and an omnidirectional pattern offers a variety of uses suited for indoor applications. The antenna is specifically designed for internal applications covering the 850/900/1800/1900 and UMTS bands.

FEATURES

- Multi-band operation: 824 MHz – 960 MHz, 1710 MHz – 2170 MHz
- Available in various cable and connector configurations
- Lightweight and small form factor
- Easily mounts directly to inside of device housing
- Conformance to RoHS
- Patent pending design

MARKETS

- Wireless Terminal
- POS, Vending Machine
- M2M (Machine-to-Machine)
- AMR (Meter Reading)
- Telemetry
- Security

SPECIFICATIONS

Frequency	824 MHz – 960 MHz, 1710 MHz – 2170 MHz
Gain	2.20 dBi @ 900 MHz, 3.80 dBi @ 2000 MHz
Input Impedance	50 Ohm
Polarization	Linear, Vertical
VSWR	3.0:1 @ 900 MHz, 2.5:1 @ 2000 MHz
Average Efficiency	55% @ 900 MHz, 69% @ 2000 MHz
Dimensions	70 x 20 x 0.8 mm
Operational Temperature	-40°C to +75°C
Mount Style	Internal
RoHS	Compliant

Note: There will be some variance of spec with different type of cable, different length of cable and connector. The performance may vary according to the device concept. The antenna is optimized for 5 inch-6 inch cable length as baseline design.

Americas: +1.847.839.6925
IAS-AmericasSales@lairdtech.com




Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: IAS-AsiaSales@lairdtech.com

Middle East & Africa: +44.1628.858941 IAS-
MEASales@lairdtech.com

www.lairdtech.com

ANTENNA PATTERNS

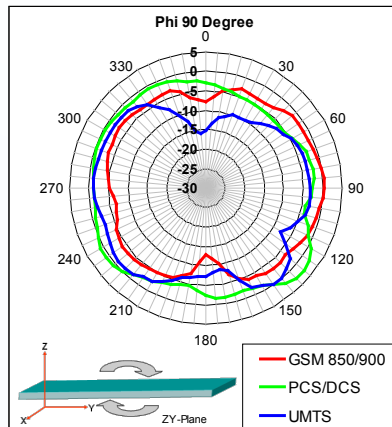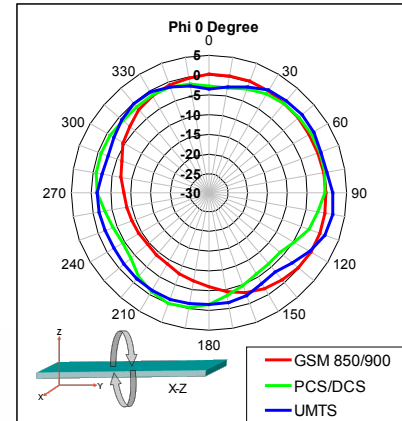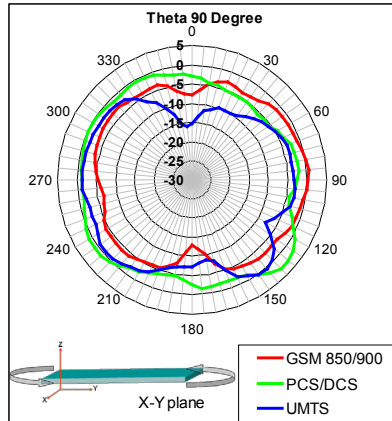

SYSTEM ORDERING INFORMATION

Part No.	Cable	Connector
EPR8221A1-13UFL	127 mm, Ø 1.13 mm (5 inch)	IPEX MHF
EPR8221A1-15UFL	152 mm, Ø 1.13 mm (6 inch)	IPEX MHF

ANT-DS-REVIE PRIME 0316

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights