


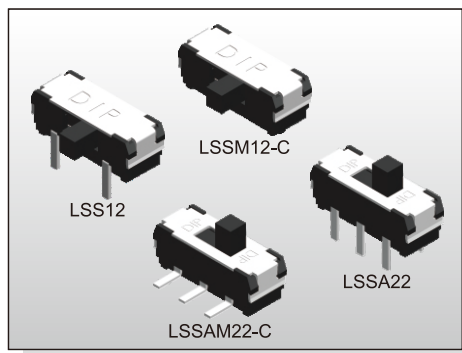

FEATURES

- ※2.0mm stroke
- ※Through hole or SMT
- ※1P2T, 2P2T models


APPLICATION

- ※Remote control
- ※Consumer electronics
- ※Instrumentations

SPECIFICATION

Contact Rating	0.1A, 12V DC
Contact Resistance	60mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	500V AC/1 minute
Operating Force	200±150gf
Travel	2mm
Operating Life	10,000 cycles
Operating Temp.	-10°C ~ +60°C
Storage Temp.	-20°C ~ +70°C

CIRCUIT

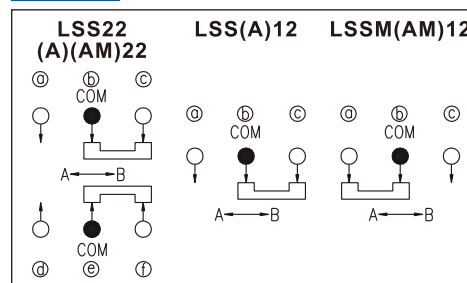

PACKAGE

<Bag>

LSS(A)12, 22: 1000 pcs

<Tube>

LSS□2, LSS□2M, LSS□2L: 50 pcs

<Tape & Reel>

LSS12, 22-N,P,S,Q,R: 900 pcs

LSS12, 22-□,M,L: 800 pcs

LSS12, 12-40-P, 22□-40: 800 pcs

LSSM12-P, LSSM12-40-P: 800 pcs

LSSM12: 1000 pcs

LSSA(M)12, 22: 600 pcs

LSSA12, 22M,L-P: 600 pcs

LSSA12, 22R-P: 500 pcs

HOW TO ORDER

L S S □ □ □ - □ □ - □ □ - □ □

Slide Direction:

- =Horizontal
- M=Horizontal S.M.T.
(Only for 1P2T)
- AM=Vertical S.M.T.
- A=Vertical Through Hole

Poles-Positions:

- 12=1P2T
- 22=2P2T

Terminal Length:

(Only for Through Hole)

- =3.00mm L=2.50mm M=2.20mm
- N=1.80mm Q=1.50mm R=1.20mm
- P=1.00mm S=0.90mm

Stem Length(Except LSSAM/LSSA Type):

- =2.00mm 40=4.00mm 32=3.20mm

Package:

- =Bag
- B=Tube(Only for LSS)
- T/R=Tape & Reel


V=RoHS & Lead Free Solderable
Q=Halogen Free

Stem Direction:

- =LSS(A) Stem in the Right
- LSS(A)M Stem in the Left
- C=LSS(A) Stem in the Left
- LSS(A)M Stem in the Right




- =Without Post(Except LSSM Type)
- P=Base With Post

LSS22

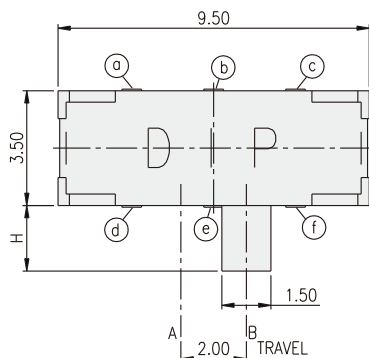


PART NO.	H
LSS22	2.0
LSS22-32	3.20
LSS22-40	4.0

PART NO.	L
LSS22	3.0
LSS22S	0.90
LSS22P	1.0
LSS22R	1.20
LSS22Q	1.50
LSS22N	1.80
LSS22M	2.20
LSS22L	2.50

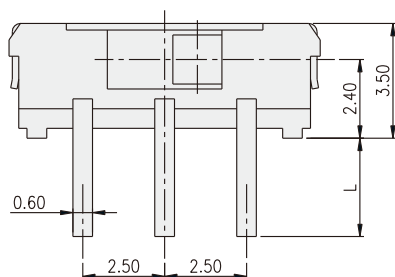



P.C.B. LAYOUT

LSS12

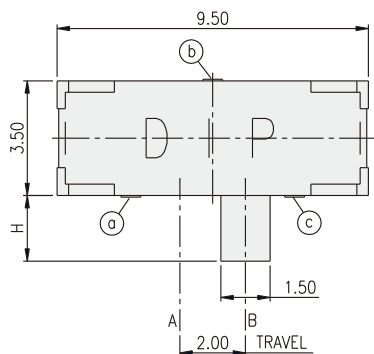


PART NO.	H
LSS12	2.00
LSS12-32	3.20
LSS12-40	4.00

PART NO.	L
LSS12	3.0
LSS12S	0.90
LSS12P	1.0
LSS12R	1.20
LSS12Q	1.50
LSS12N	1.80
LSS12M	2.20
LSS12L	2.50

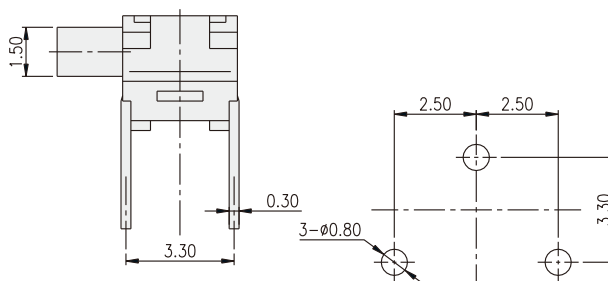
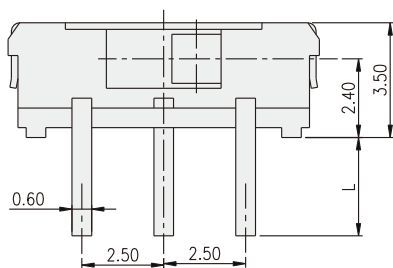


P.C.B. LAYOUT

LSSA22




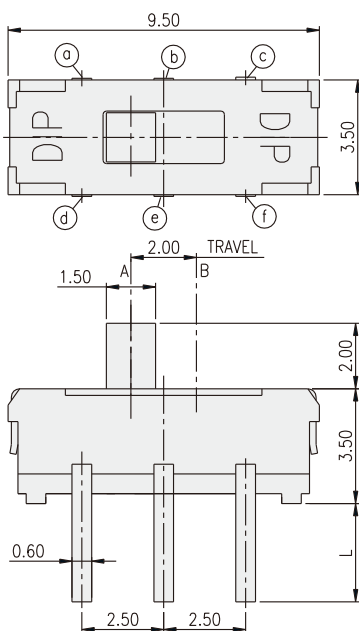


PART NO.	L
LSSA22	3.0
LSSA22S	0.90
LSSA22P	1.0
LSSA22R	1.20
LSSA22Q	1.50
LSSA22N	1.80
LSSA22M	2.20
LSSA22L	2.50

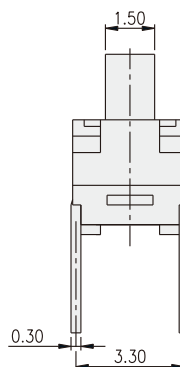





P.C.B. LAYOUT

LSSM12-P

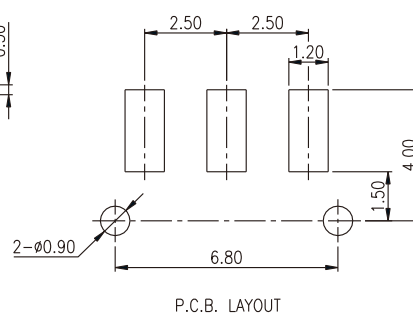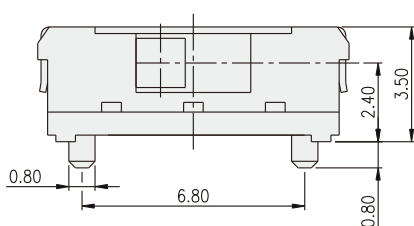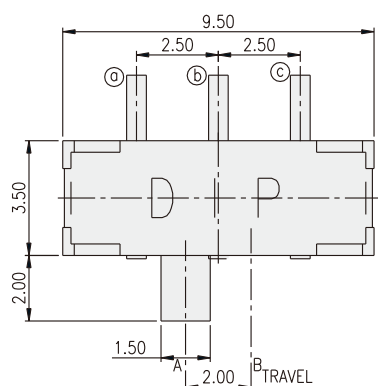

P.C.B. LAYOUT

LSSAM22-P

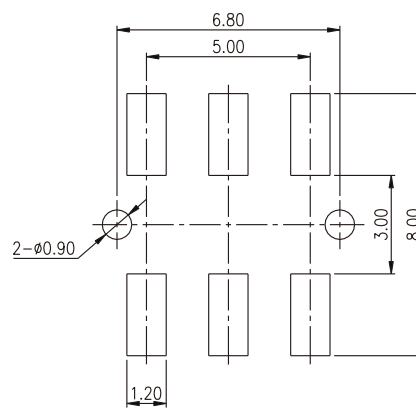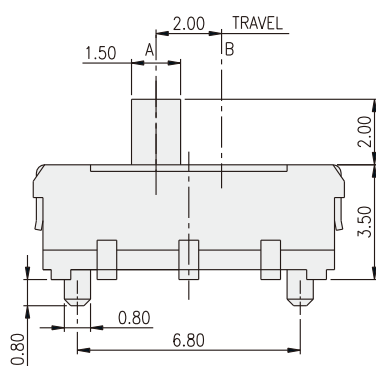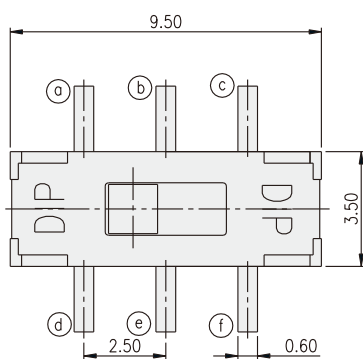

P.C.B. LAYOUT