




| No. of Contacts | Dimensions | |
|-----------------|------------|-------|
| | A | B |
| 2 | 1.00 | 2.00 |
| 3 | 2.00 | 3.00 |
| 4 | 3.00 | 4.00 |
| 5 | 4.00 | 5.00 |
| 6 | 5.00 | 6.00 |
| 7 | 6.00 | 7.00 |
| 8 | 7.00 | 8.00 |
| 9 | 8.00 | 9.00 |
| 10 | 9.00 | 10.00 |
| 11 | 10.00 | 11.00 |
| 12 | 11.00 | 12.00 |
| 13 | 12.00 | 13.00 |
| 14 | 13.00 | 14.00 |
| 15 | 14.00 | 15.00 |
| 16 | 15.00 | 16.00 |
| 17 | 16.00 | 17.00 |
| 18 | 17.00 | 18.00 |
| 19 | 18.00 | 19.00 |
| 20 | 19.00 | 20.00 |
| 21 | 20.00 | 21.00 |
| 22 | 21.00 | 22.00 |
| 23 | 22.00 | 23.00 |
| 24 | 23.00 | 24.00 |
| 25 | 24.00 | 25.00 |
| 26 | 25.00 | 26.00 |
| 27 | 26.00 | 27.00 |
| 28 | 27.00 | 28.00 |
| 29 | 28.00 | 29.00 |
| 30 | 29.00 | 30.00 |
| 31 | 30.00 | 31.00 |
| 32 | 31.00 | 32.00 |
| 33 | 32.00 | 33.00 |
| 34 | 33.00 | 34.00 |
| 35 | 34.00 | 35.00 |
| 36 | 35.00 | 36.00 |
| 37 | 36.00 | 37.00 |
| 38 | 37.00 | 38.00 |
| 39 | 38.00 | 39.00 |
| 40 | 39.00 | 40.00 |





B1 TYPE

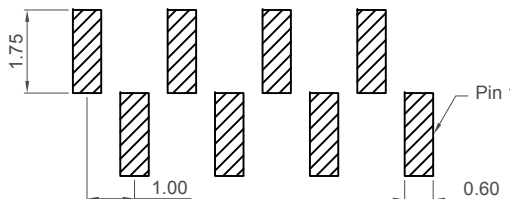

B1 TYPE

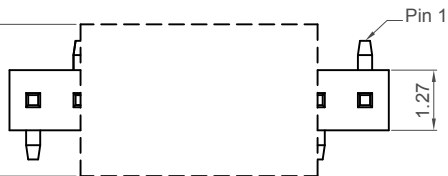

B2 TYPE

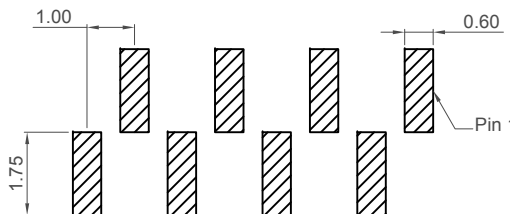

B2 TYPE

Recommended PCB Layout
General Tolerance ±0.05
Solder Area

Specifications

Material

Contact: Phosphor Bronze
Insulator: Polymer LCP, UL 94V-0, Black

Plating

See ordering grid

Electrical

Current Rating: 1 Amp
Contact Resistance: 20 mΩ max.
Insulation Resistance: 1000 MΩ min.
Dielectric Withstand Voltage: 300 V AC

Soldering Process:

IR Reflow: 260°C for 10 sec.
Wave: 250°C for 5-10 sec
Manual Solder: 350°C for 3-5 sec

Mechanical & Environmental

Operating Temperature: -40°C to +105°C

Mates with (Subject to pin length):

BC065 BC070 BC075

Ordering Grid
BC032-XX-X-X-XXXX-XXXX-L-X

No. of Contacts
02 to 40

Contact Plating
A = Gold Flash All Over (Standard)
C = Tin All Over

Type
2 = B2 Type (Standard)
1 = B1 Type

Dimension C (1/100mm)
(Bottom of Pin to Top of Insulator)
0200 = 2.00mm (Standard)
or specify Dimension C
eg 0250 = 2.50mm
(Minimum 0150=1.50mm)

Request Samples
and Quotation

Packing Options

B = Tape and Reel with Cap (Standard) - See note above
D = Tube (unavailable in 2 & 3 contacts)
E = Tube with Cap (unavailable in 2, 3, 4, 5 contacts)
G = Plastic Box (only available in 2 & 3 contacts)

Insulator Material
L = LCP (Standard)

Dimension D (1/100mm) (Post Height)
0200 = 2.00mm (Standard)
0380 = 3.80mm (Standard)
or specify Dimension D
eg 0250 = 2.50mm
(Maximum 0500=5.00mm)
(Minimum 0100=1.00mm)

| | | | |
|-------------------------------|----------------|---|----------------------|
| Part Number BC032 | | Product Description 1.0mm Pitch Pin Header, Single Row, Surface Mount, Vertical | |
| Drawing Date 20th May 2008 | | | |
| By | CC | Tolerances (Except as Noted) | Units: |
| Detail | BC032 F PCN | Length X. ± 0.30 X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.10 | Metric (mm) |
| Revision | F1 | Angle X.° ± 5° X.X° ± 3° X.XX° ± 2° X.XXX° ± 1° | 3rd Angle Projection |
| Date | 18/08/17 | | |



This drawing is confidential and
copyright of Global Connector
Technology, Ltd (GCT).
This drawing must not be copied
or disclosed without written
consent. E & OE



Not to Scale
Drawn By ASE
Sheet No. 1/1

H
G
F
E
D
C
B
A