Mini Terminal Block

multicomp



PCB Layout

Specifications:

Material

Terminal Wire Protector Insulating Body Screw Colour

Environmental

Operation Temperature Short Time Temperature

Electrical

Current Rating Insulation withstands Volt Insulation Resistance PCB Hole Dia. Wire Strip Length Wire Range Screw Torque

RoHS Compliant

: Brass, Tin Plated	
---------------------	--

: Stainless Strip Steel


- : Polyester
- : M3, Steel, Nickel Plated

: Blue

: -33°C to +105°C

: 250°C (+482°F)

- : 16A 250V AC
- : 1,500V AC Min.
- : >5,000MΩ 500V DC
- : Ø1.4mm
- : 4mm to 5mm
- : 16AWG to 24AWG
- : 4lb-inch

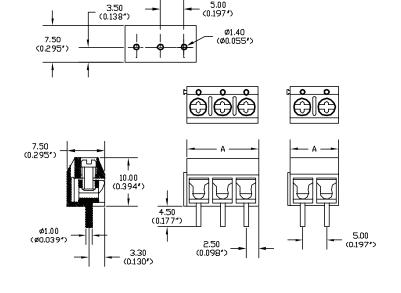

Dimensions : Millimetres (Inches)

Pitch: 5mm (0.197")			
Poles	A (mm)	A (Inch)	
2	10	0.394	

Part Number Table

Description	Part Number
Mini Terminal Block	MC24356

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

