


Date	SYM	REVISION RECORD	AUTH	DR.	CK.

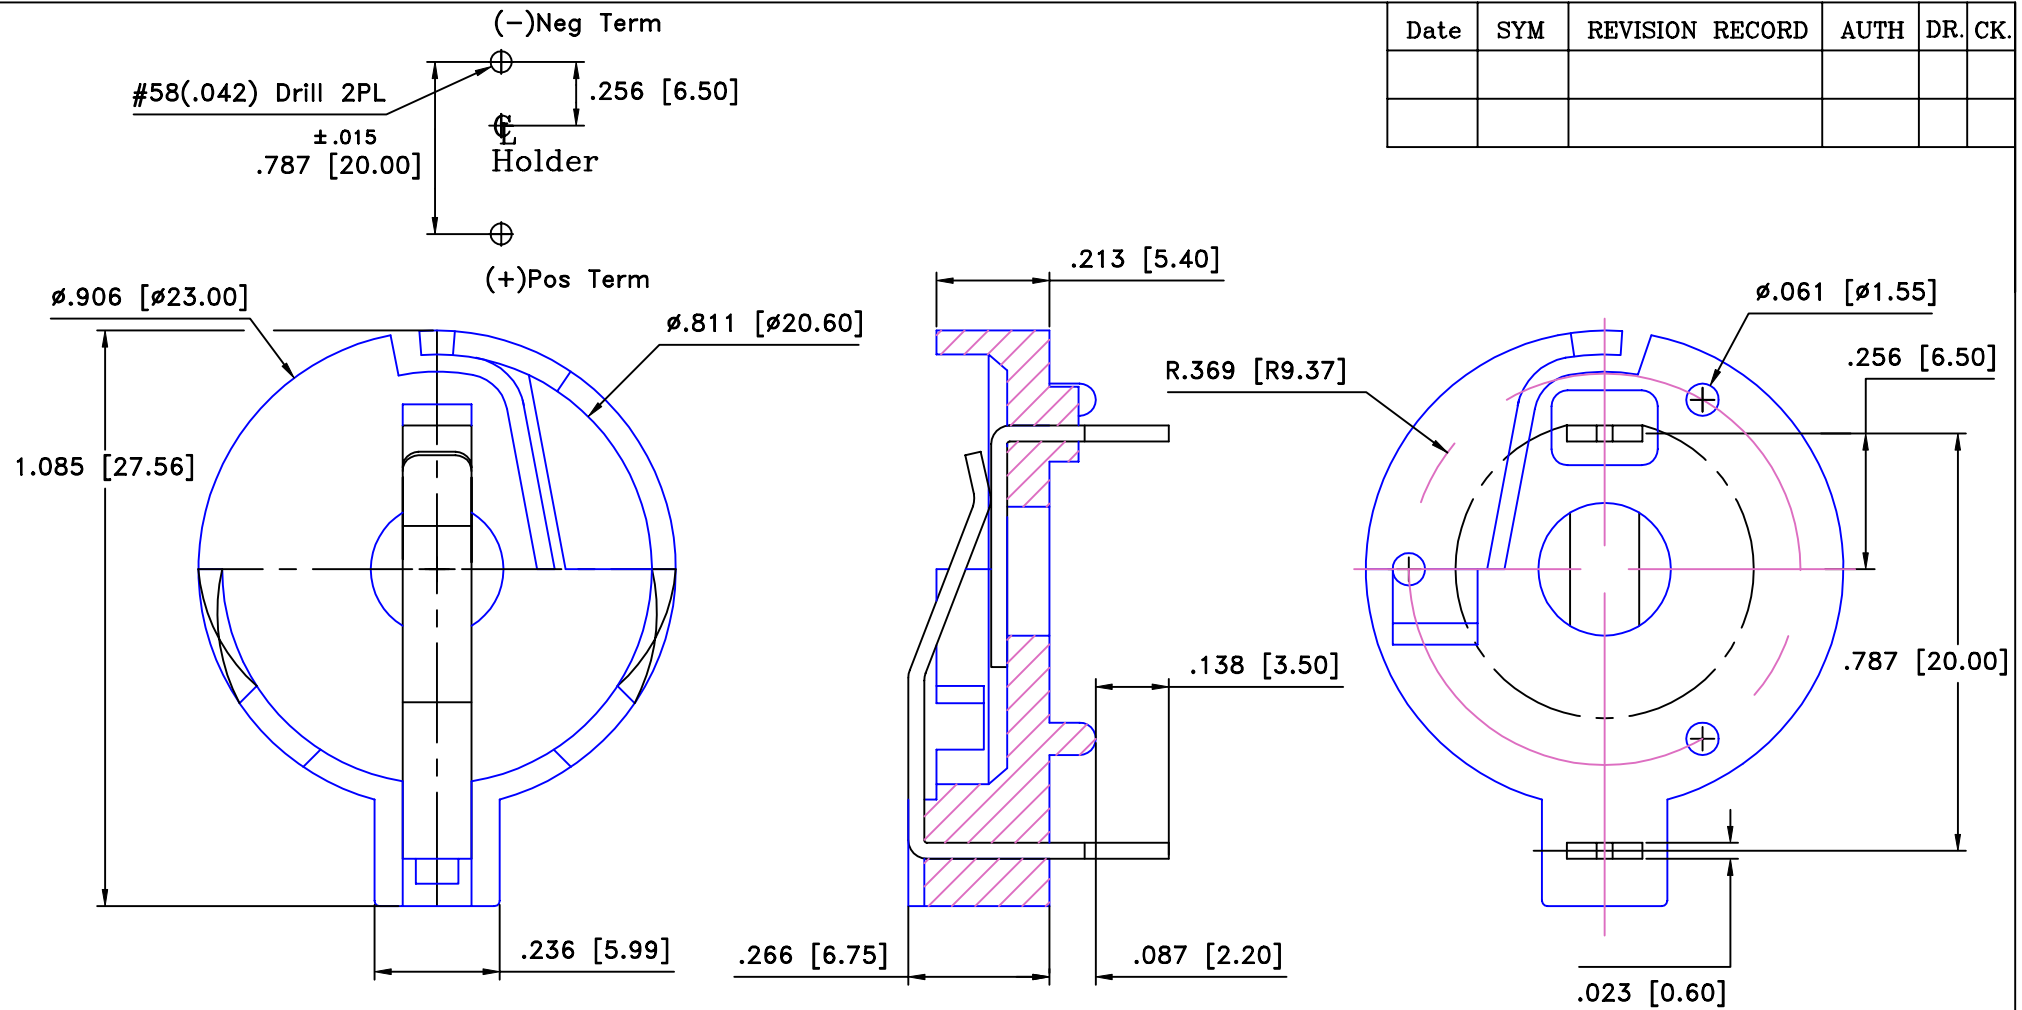

MATERIAL

BODY: FR-NYLON WITH 33% GLASS FILLED, UL94V-0 FILE NO. E4179(M)

CONTACT: PHOSPHOR BRONZE

FINISH

CONTACT: TIN PLATED OVER NICKEL

SPECIFICATIONS


APPLICATION FOR 3V LITHIUM BATTERY

INSULTOR RESISTANCE: 5000 M Ω MIN.

OPPERATION TEMPERATURE: -55°C TO +105°C

DURABILITY: 50 CYCLES MIN

CONTACT RESISTANCE: 30 M Ω MAX

Tolerance (Except as noted)	 Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
decimal $\pm .5$ (.020)		4=1	Approved By T.B.
Fractional $\pm .8$ (.030)	Title BR/CR 2032 COIN BATTERY HOLDER W/RETAINER ARM		
Angular $\pm 3^\circ$	Date 04/13/02	Drawing Number BS-3	