

MEC8-DV SERIES

(0.80 mm) .0315"

VERTICAL MICRO EDGE CARD SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?MEC8-DV

Insulator Material:
Black LCP

Contact Material:
Phosphor Bronze

Plating:
Au or Sn over
50 μm (1.27 μm) Ni

Operating Temp Range:
-55 °C to +125 °C

Insertion Depth:
(4.22 mm) .166" to
(5.66 mm) .223"


Current Rating:
1.8 A per pin
(4 adjacent pins powered)

Voltage Rating:
185 VAC

RoHS Compliant:
Yes


Mates with:
(1.60 mm) .062"
thick card

APPLICATIONS

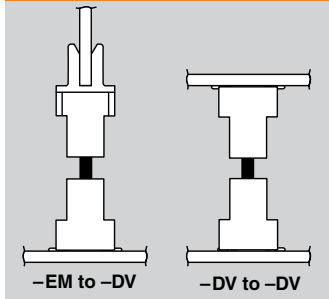

Mates with (1.60 mm)
.062" thick card

Variety of
lead counts

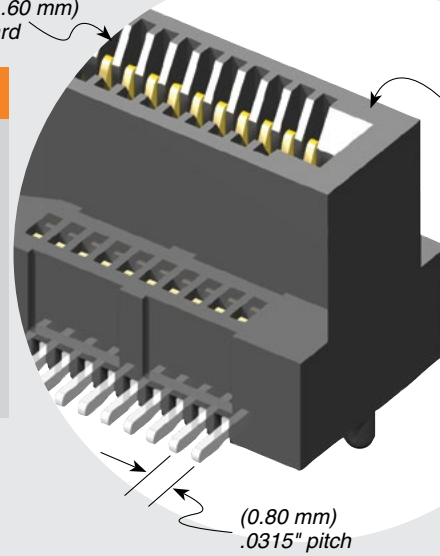

HIGH-SPEED CHANNEL PERFORMANCE

MEC8-DV

Rating based on Samtec reference channel.
For full SI performance data visit Samtec.com
or contact SIG@samtec.com

25
Gbps

PROCESSING

Lead-Free Solderable:
Yes

SMT Lead Coplanarity:
(0.10 mm) .004" max (10-50)
(0.15 mm) .006" max (60-70)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



FILE NO. E111594

ALSO AVAILABLE (MOQ Required)

- 1 mm mating card thickness option
- Locking clip (Manual placement required)

Contact Samtec.

OTHER SOLUTIONS

- Right-angle
- Edge Mount

See samtec.com?MEC8-RA
or samtec.com?MEC8-EM

Notes:

While optimized for 50 Ω applications, this connector with alternative signal/ground patterns may also perform well in certain 75 Ω applications. Contact Samtec for further information.


Some sizes, styles and options are non-standard, non-returnable.





10, 20, 30, 40, 50, 60, 70

-L = 10 μm (0.25 μm) Gold on contact, Matte Tin on tail

- A = Alignment Pin
- K = (5.50 mm) .217" DIA Polyimide Pick & Place Pad

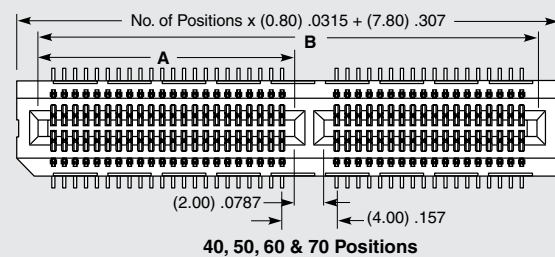

POSITIONS PER ROW	A	B
40	(18.90) .744	(36.60) 1.441
50	(22.90) .902	(44.60) 1.756
60	(26.90) 1.059	(52.60) 2.071
70	(30.90) 1.217	(60.60) 2.386

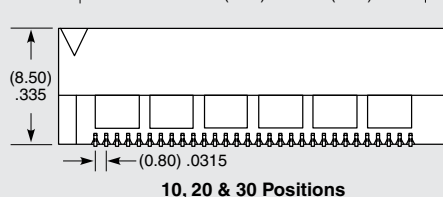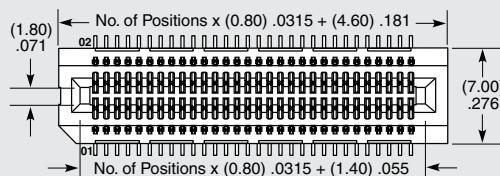

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.