



SPC  
TECHNOLOGY




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			AMU	16-08-10	JAG	18-08-10	XXX	25-08-10

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

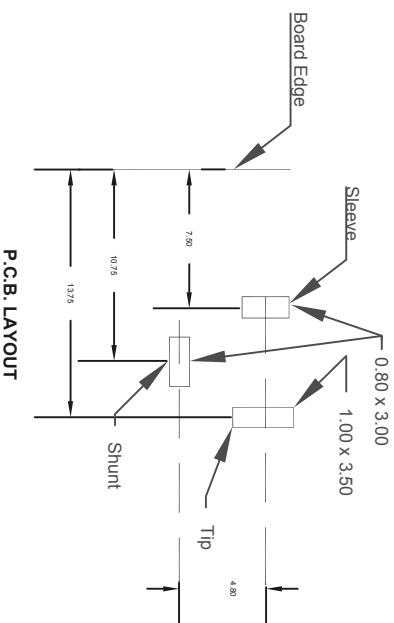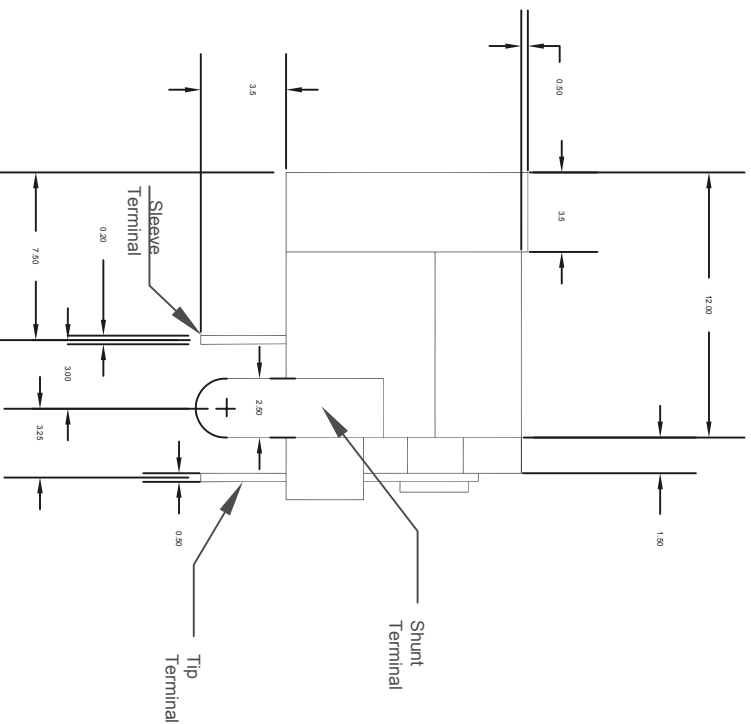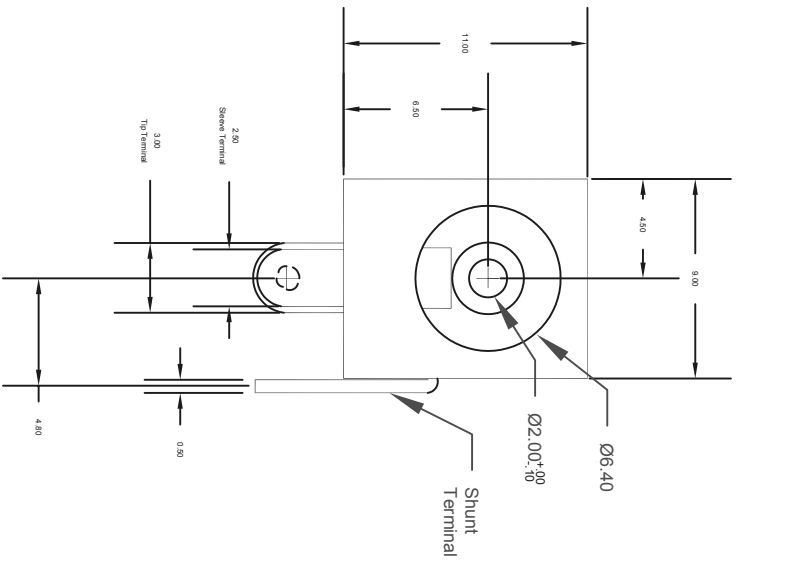


Specifications:

Electrical

- Contact rating: 5A at 16VDC
  - Contact Resistance: 30 milliohms maximum
  - Insulation Resistance: 100 Megohms Minimum at 500VDC
  - Dielectric Strength: 500VAC
- Mechanical
- Insertion Force: 0.30 to 3.0kg
  - Withdrawal Force: 0.30 to 3.0kg
  - Operating Life: 5,000 cycles

Dimensions : Inches (mm)  
Part Number Table

Description	Part Number
Power Jack	SPC21364

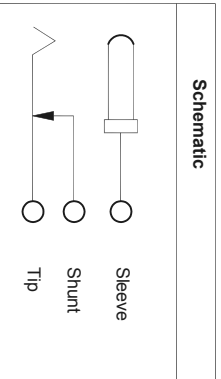

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWING TITLE:

Power Jack

DRAWN BY: AMU DATE: 16-08-10

CHECKED BY: JAG DATE: 18-08-10

APPROVED BY: XXX DATE: 25-08-10

SIZE: XXX

DWG. NO.: XXX

SCALE: NTS

U.O.M.: INCHES [mm]

SHEET: 1 OF 1

ELECTRONIC FILE: 84N1161

REV: A

DISCLAIMER:  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.