
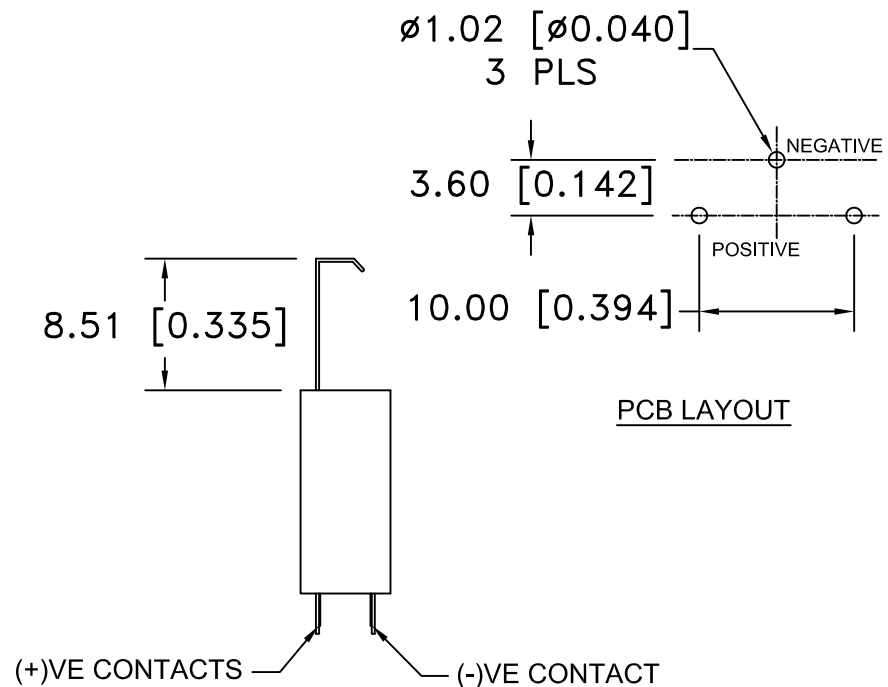
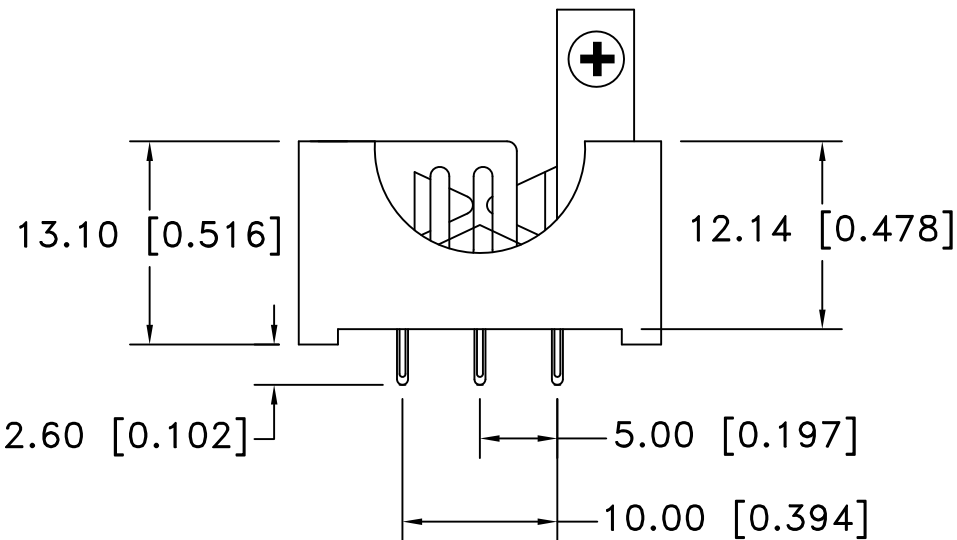



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/01/05	B	"Ω" SIGN WAS "?"	T.B.	B.S.	
10/22/05	C	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
9/04/08	D	COLOR WAS BLUE	T.B.	B.S.	
5/13/11	E	CONTACT PLATING WAS TIN PLATING	T.B.	B.S.	
07/29/11	F	UPDATED NOTES	T.B.	B.S.	

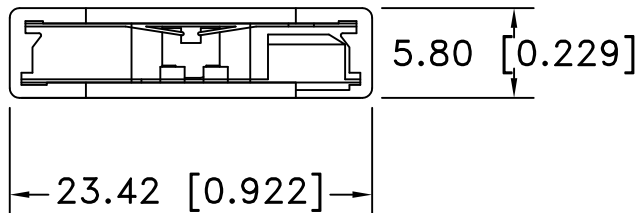

NOTES:

MATERIAL: GLASS FILLED NYLON 66, UL94V-0
 COLOR BLACK, UL FILE NO. E196894
 CONTACTS: PHOSPHOR BRONZE, C5191, NICKEL PLATED
 ELECTRICAL :
 VOLTAGE: 250V AC
 CONTACT RESISTANCE: 30mΩ MAX
 INSULATION RESISTANCE: 1000mΩ AT DC 500V
 DIELECTRIC STRENGTH: AC 1000V PER MINUTE
 TEMPERATURE RANGE: -40°C TO +200°C
 ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
		Approved By T.B.	
decimal ±.5 (.020)	Title BR/CR/DL 2032 VERTICAL BATTERY HOLDER, 3 PINS		
Fractional ± .8 (.030)	Date 07/29/11	Drawing Number BK-5058	
Angular ± 3°			